



C.R.I. PUMPS
Pumping trust. Worldwide.

Technical Data

Pump Model
MVS-44/01T

Project Name : Untitled project 2025-03-18 11:59:03.421	Project ID :
Company Name : Department : Phone number : e-mail address :	

Requested Data

Flow : 40.34 m ³ /h Head : 22.23 m	Fluid : Water Density : 0.9983 kg/dm ³ Viscosity : 1.005 mm ² /s Temperature : 20 °C Vapour pressure at t A : 0.0234 bar
--	---

Pump

Operating Data

Pump Model : MVS-44/01T No. of Stages : 1 Inlet / Outlet size : 80 Speed : 2900 1/min Direction of Rotation : Counter clockwise Impeller type : Radial impeller Impeller Design : Closed Pump Weight (Approx) : 64 kg Pump Standard : CRI Standard	Flow : 39.29 m ³ /h Head : 21.09 m Shutoff Head : 27.03 m Efficiency : 78.45 %
---	--

Motor

Motor Model : MV 3P 5.5HP (IE3) (380-720V) Frequency/Efficiency class : 50 Hz IE3 = Premium Efficiency Rated Voltage : 380V-415V Δ / 660V-720V λ Rated current : 9.1A / 5.3A Phase / Rated Power P2 : 3~ 4 kW Speed : 2820 1/min Efficiency : 88.1 % Motor Weight (Approx) : 27.9 kg Motor Standard : IEC-60034-30 / IS-12615	Insulation Class : F Frame size : 100 Degree of Protection : IP 55 Method of Starting : Direct starting Service factor : 1 Power factor : 0.74
--	---

Material of Construction

Flange Connections

Pump Outer Shell : AISI 304 Pump Head : AISI 304/CF8 Pump Head Stool : C.I Pump Base : AISI 304/CF8 Base Plate : C.I Impeller : AISI 304 MECHANICAL SEAL : SiC/SiC/FKM Bush : SiC / SiC Diffuser (Chamber) : AISI 304 Pump Shaft : AISI 431 Wearing Ring : Teflon FLANGE : C.I Neck Ring : AISI 304 O Ring : EPDM Coupling : C.I Split Cone : AISI 304	Suction Flange Pressure rating : PN 16 Nominal pipe size : DN 80 Standard : DIN EN 1092-1:2008-09 Discharge Flange Pressure rating : PN 16 Nominal pipe size : DN 80 Standard : DIN EN 1092-1:2008-09
---	--



C.R.I. PUMPS
Pumping trust. Worldwide.

Performance Curve

Pump Model
MVS-44/01T

Project Name : Untitled project 2025-03-18 11:59:03.421

Project ID :

Company Name :


Department :

Phone number :

e-mail address :

Curve Tolerance ISO : 9906, Grade-3B

Speed 2900 rpm

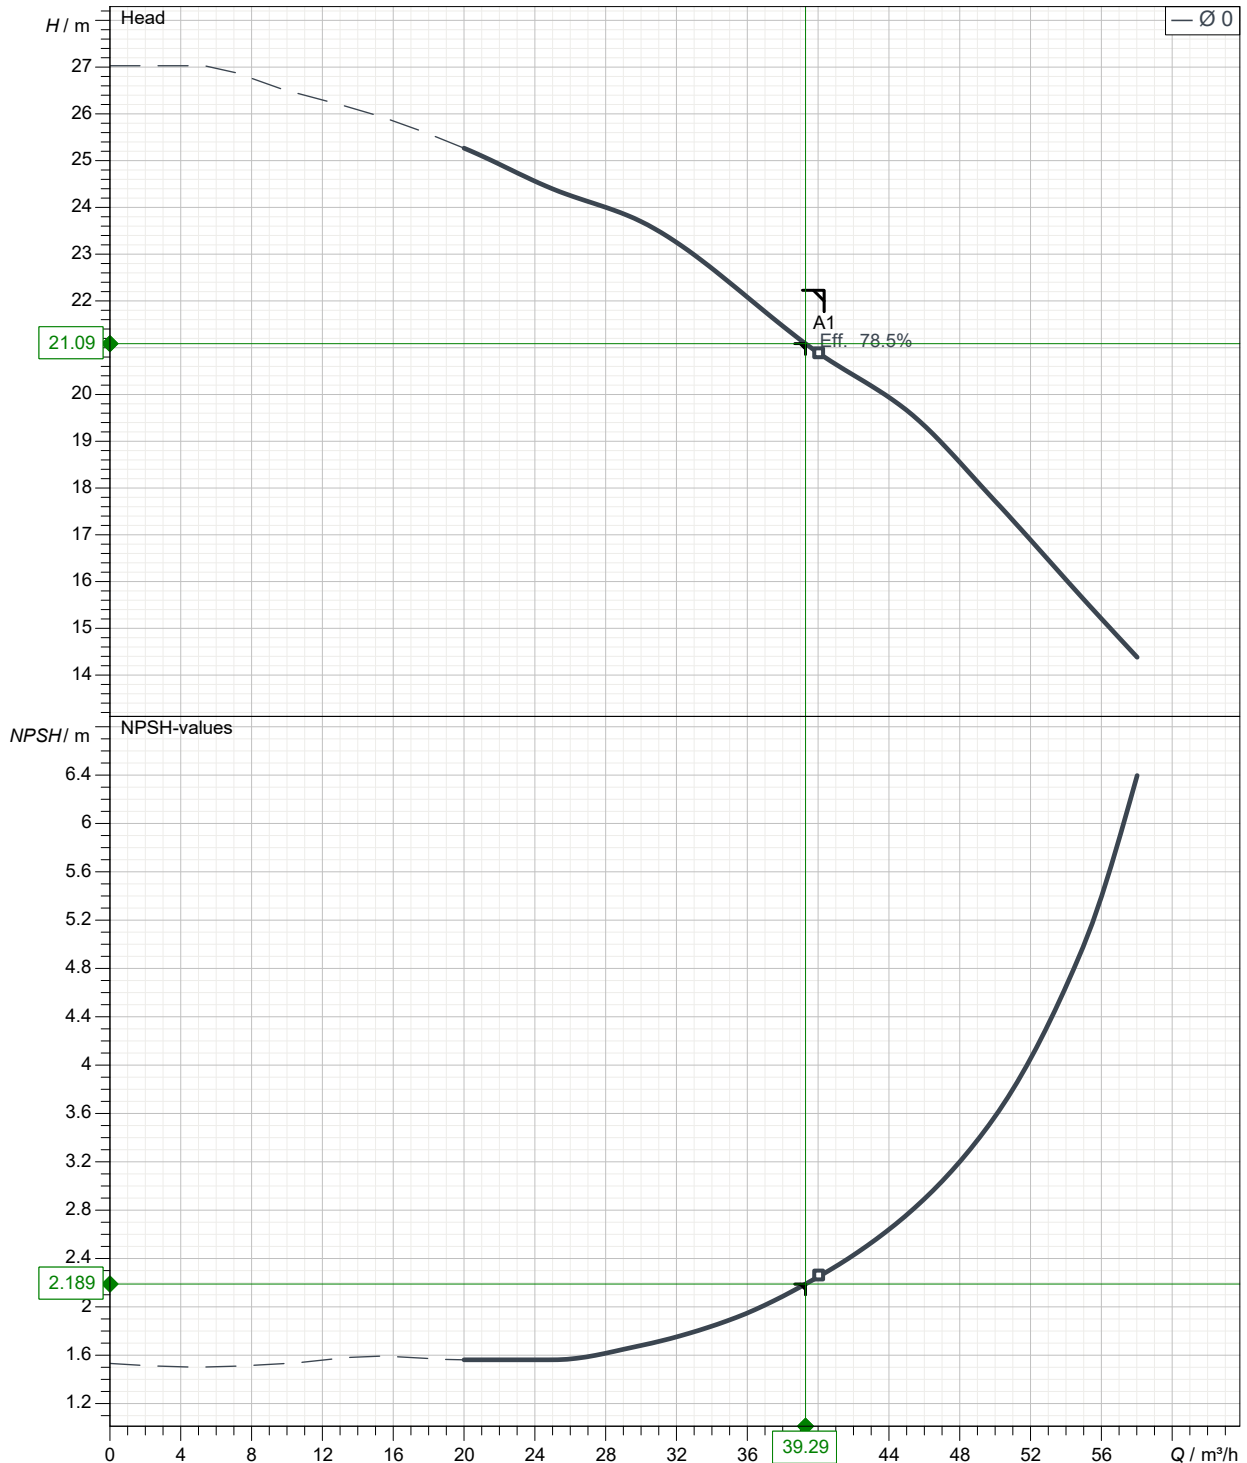



C.R.I. PUMPS
Pumping trust. Worldwide.


Dimensional Drawing

Pump Model
MVS-44/01T

Project Name : Untitled project 2025-03-18 11:59:03.421

Project ID :

Company Name :
Department :
Phone number :
e-mail address :

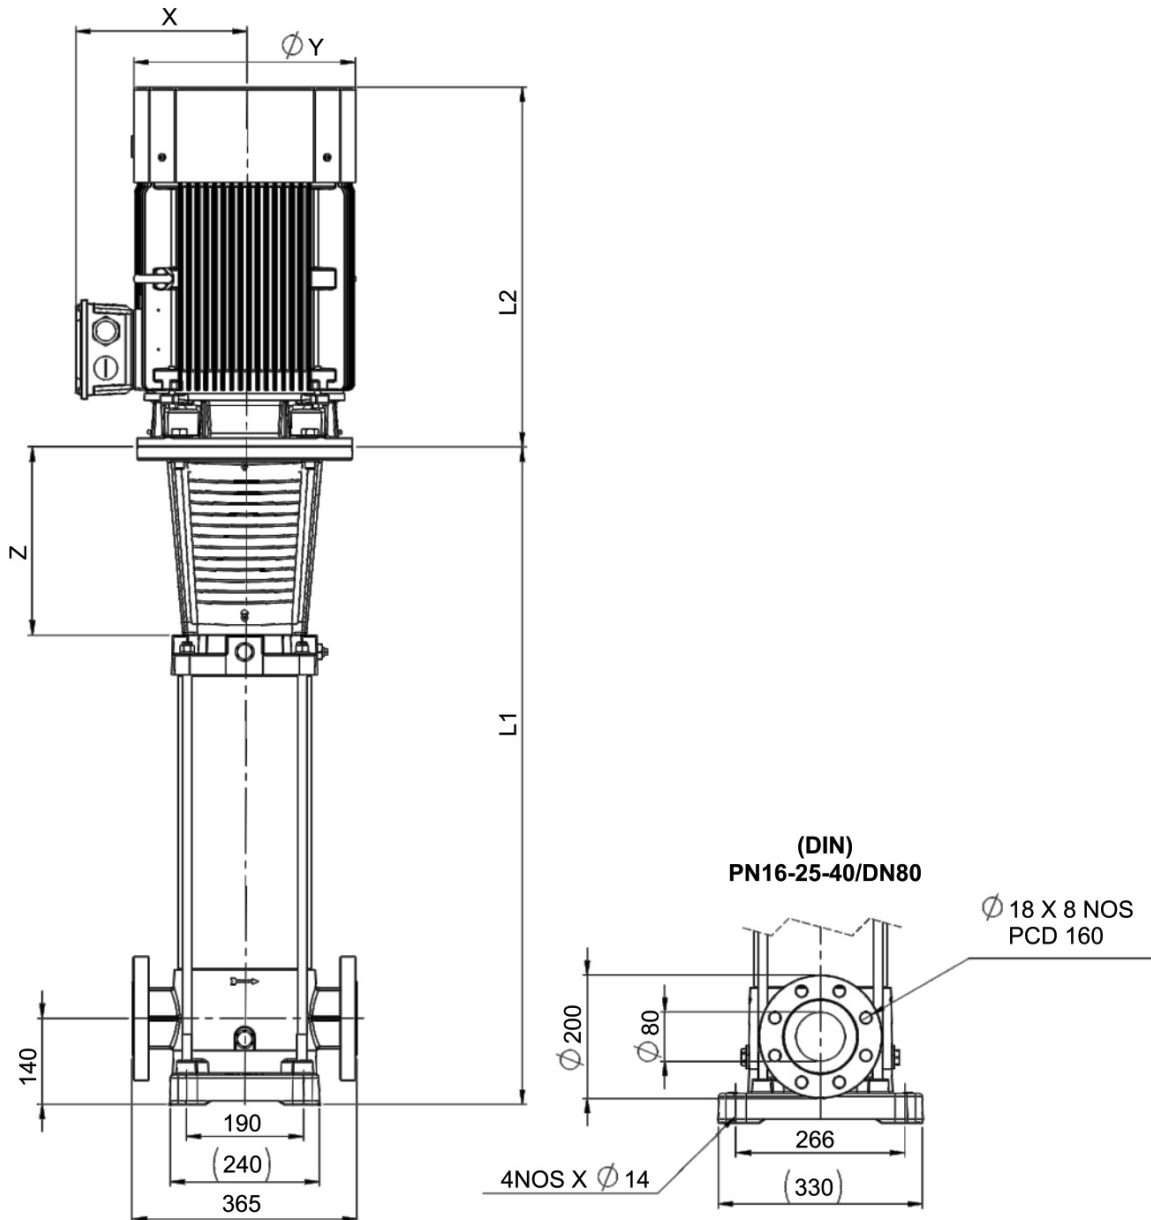

In View of continuous developments, The information/specifications/Description/ Illustrations are subject to change without notice.

Dimensions inmm

L1	564		
L2	363		
OD	270		
X	132		
Y	197		
Z	190		