



C.R.I. PUMPS
Pumping trust. Worldwide.

Technical Data

Pump Model

S4S-8/58

Project Name : Untitled project 2025-03-18 12:11:26.344

Project ID :

Company Name :
Department :
Phone number :
e-mail address :

Requested Data

Flow	: 8.042 m ³ /h	Fluid	: Water
Head	: 220.3 m	Density	: 0.9983 kg/dm ³
		Viscosity	: 1.005 mm ² /s
		Temperature	: 20 °C
		pH-value at t A	:
		Vapour pressure at t A	: 0.0234 bar

Pump

Pump Model	: S4S-8/58	Minimum Continuous Flow	: 3.5 m ³ /h
No. of Stages	: 58	Flow	Nominal : 8.043 m ³ /h
Outlet Size	: 50		Max- : 11.71 m ³ /h
Speed	: 2900 1/min		Min- : 3.5 m ³ /h
Direction of Rotation	: Counter clockwise	Head	Nominal : 219.5 m
Impeller type	: Radial impeller		Max- : 291.9 m
Impeller Design	: Closed		Min- : 97.06 m
pump weight(Approx)	: 30.45 kg	Efficiency	Overall Efficiency : 48.61 %
Pump Standard	:		Pump Efficiency : 58.92 %

Motor

Motor Model	: W6A-110TN	Motor Standard	:
Frequency	: 50 Hz	Insulation Class	: Y
Phase	: 3~	Degree of Protection	: IP 68
Rated Voltage	: 525 V	Method of Starting	: Direct starting
Rated current	: 20 A	Service factor	: 1
Rated Power P2	: 11 kW	Power factor	: 0.8
Speed	: 2900 1/min	No.of.starts per hour	: 20
Efficiency	: 82.5 %	Starting current	:
Motor Weight (Approx)	: 63 kg	Starting torque	:

Material of Construction

Pump

Motor

Check Valve Housing	S.S 304	Shaft Seal / Mechanical Seal	Nitrile Rubber / Ceramic - Carbon
Check Valve Disc	S.S 304	Upper & Lower Housings	Cast Iron
Check Valve Seat	NBR/Viton	Stator Shell	SS 304 / 441
Diffuser Chamber	S.S 304	Thrust Pad	Carbon Graphite
Impeller	S.S 304	Thrust Bearing	S.S 420
Split Cone with Nut	S.S 304	Diaphragm	High Nitrile Rubber
Impeller Wearing / Seal Ring	NBR/Viton	Motor Base	S.S 304
Upthrust Washer / Stop Ring	S.S 304/Teflon,S.S 420/Bronze	Upper Housing Shell	S.S 304
Intermediate Bearing	NBR/Viton	Shaft	S.S 431
Suction Interconnector	S.S 304	Shaft Extension	17.4 Ph
Inlet Screen	S.S 304	Sleeves	S.S 431
Pump Shaft	S.S 304		
Coupling Splines	S.S 329		
Locking Strap	S.S 304		
Cable Guard	S.S 304		



C.R.I. PUMPS
Pumping trust. Worldwide.

Performance Curve

Pump Model
S4S-8/58

Project Name : Untitled project 2025-03-18 12:11:26.344

Project ID :


Company Name :

Department :

Phone number :

e-mail address :

Curve Tolerance ISO : 9906, Grade-3B

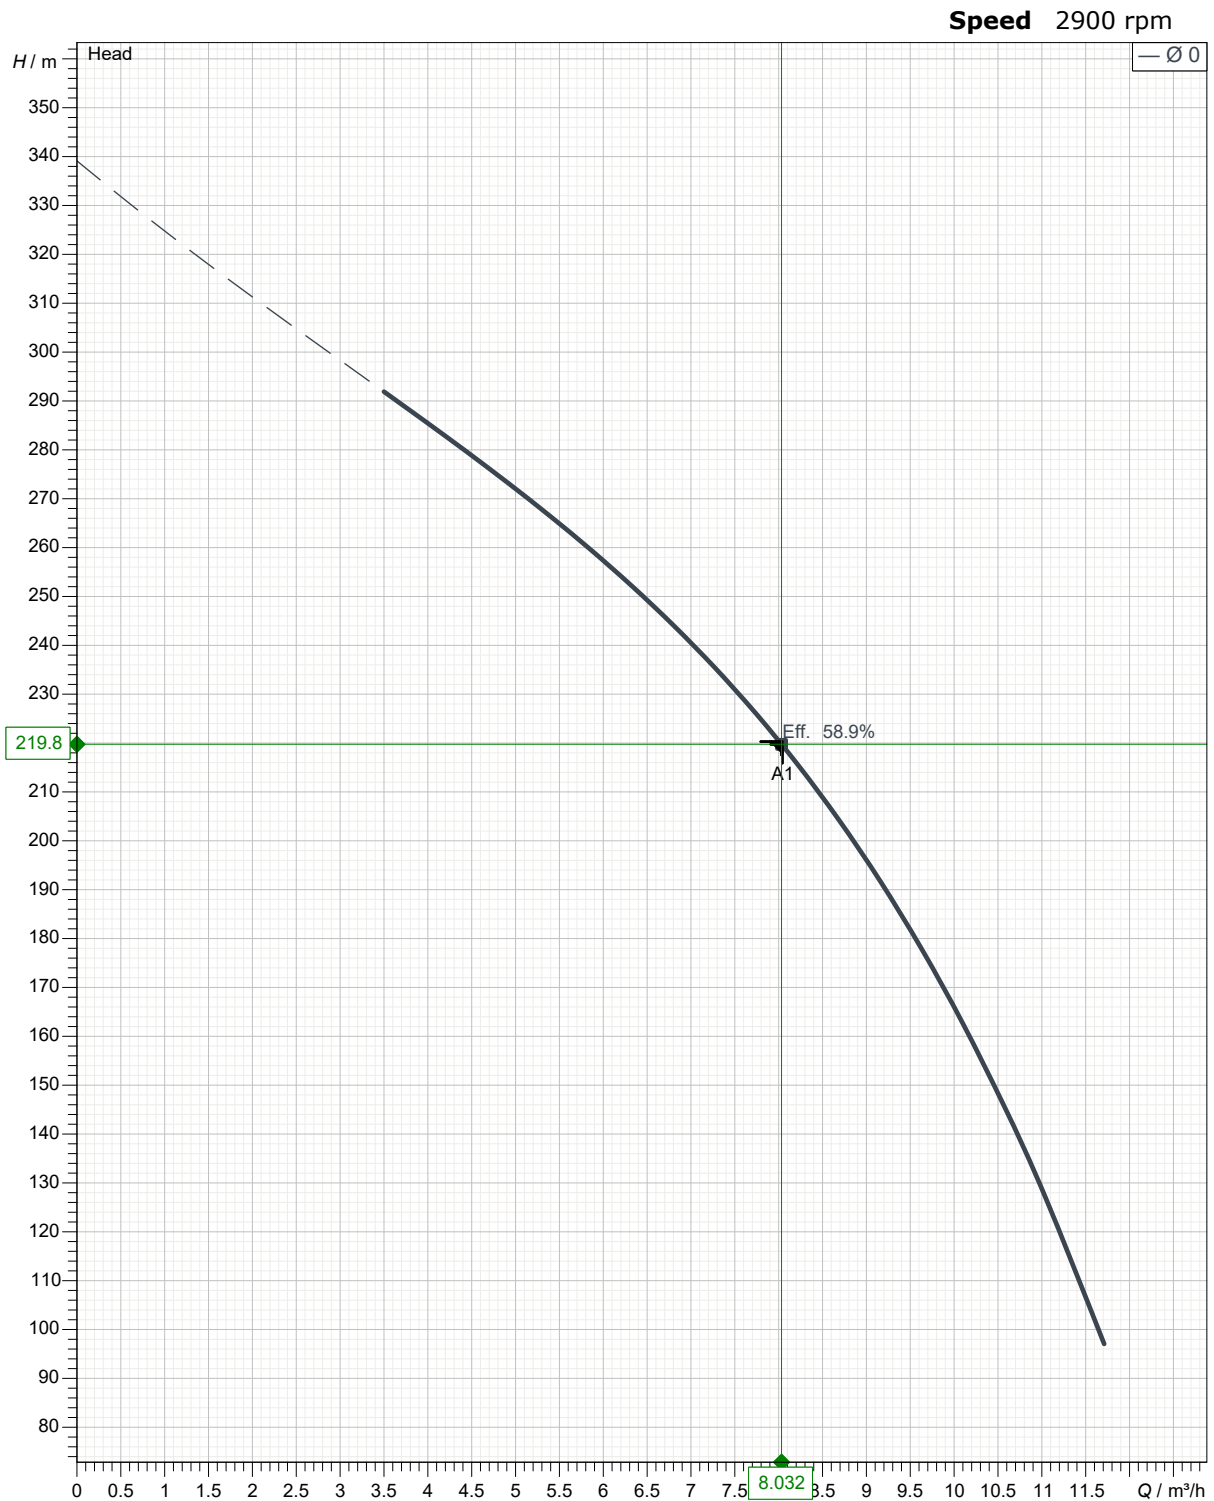



Pump Model
S4S-8/58

Project Name : Untitled project 2025-03-18 12:11:26.344


Project ID :

Company Name :

Department :

Phone number :

e-mail address :

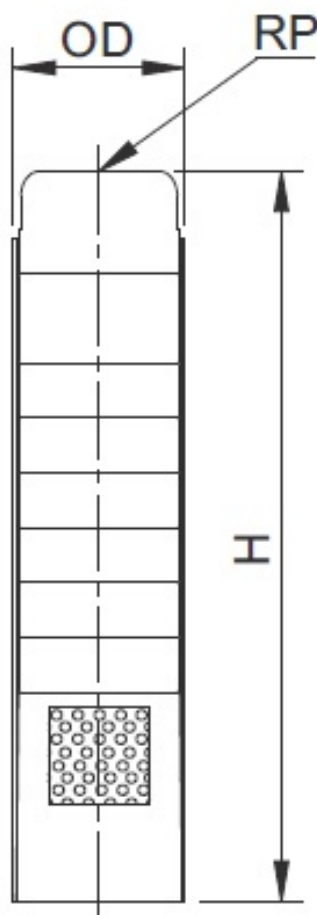

In View of continuous developments, The information/specifications/Description/ Illustrations are subject to change without notice.

Dimensions in mm

H OD RP	2390 97 50		
---------------	------------------	--	--




Motor Model
W6A-110TN

Project Name : Untitled project 2025-03-18 12:11:26.344

Project ID :

Company Name :
Department :
Phone number :
e-mail address :

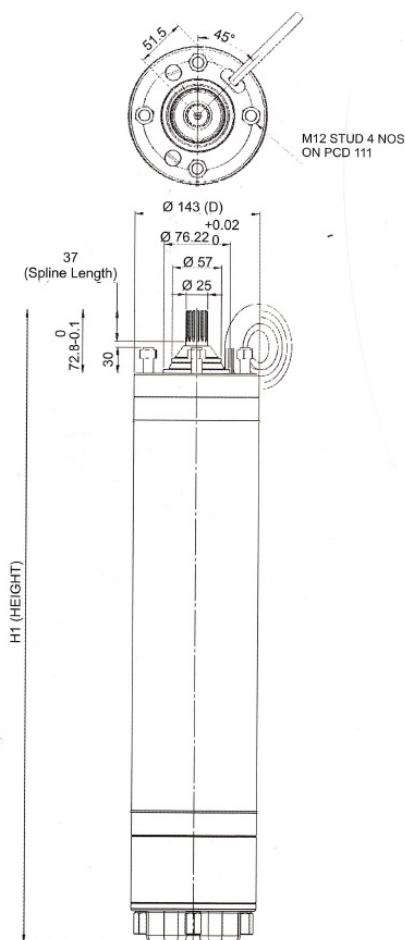

In View of continuous developments, The information/specifications/Description/ Illustrations are subject to change without notice.

Dimensions in mm

D H1	143 924		
---------	------------	--	--