



Technical Data

Project Name : Untitled project 2025-03-21 15:01:14.347	Project ID :
Company Name : Department : Phone number : e-mail address :	

Requested Data

Flow : 87.95 m ³ /h	Fluid : Water
Head : 291 m	Density : 0.9983 kg/dm ³
	Viscosity : 1.005 mm ² /s
	Temperature : 20 °C
	pH-value at t A :
	Vapour pressure at t A : 0.0234 bar

Pump

Pump Model : S8S-95/22	Minimum Continuous Flow : 40 m ³ /h
No. of Stages : 22	Flow Nominal : 87.81 m ³ /h
Outlet Size : 125	Max- : 125.8 m ³ /h
Speed : 2900 1/min	Min- : 40 m ³ /h
Direction of Rotation : Counter clockwise	Head Nominal : 288.7 m
Impeller type : Mixed Flow impeller	Max- : 415 m
Impeller Design : Closed	Min- : 122.5 m
pump weight(Approx) : 104 kg	Efficiency Overall Efficiency : 68.73 %
Pump Standard :	Pump Efficiency : 78.38 %

Motor

Motor Model : W8B-A10DI	Motor Standard :
Frequency : 50 Hz	Insulation Class : Y
Phase : 3~	Degree of Protection : IP 68
Rated Voltage : 380 V	Method of Starting : Star-delta
Rated current : 230 A	Service factor : 1
Rated Power P2 : 110 kW	Power factor : 0.86
Speed : 2900 1/min	No.of.starts per hour : 15
Efficiency : 87 %	Starting current :
Motor Weight (Approx) : 256 kg	Starting torque :

Material of Construction

Pump		Motor	
Check Valve Housing	S.S 304	Shaft Seal Housing	Cast Iron
Check Valve Disc	S.S 304	Shaft Seal / Mechanical Seal	Nitrile Rubber / Ceramic - Carbon , SiC
Check Valve Seat	Nitrile Butyle Rubber	Upper & Lower Housings	Cast Iron
Diffuser Chamber	S.S 304	Stator Shell	SS 304
Impeller	S.S 304	Thrust Pad	Carbon Graphite
Split Cone with Nut	S.S 304	Thrust Bearing	SS 420
Impeller Wearing / Seal Ring	Nitrile Butyle Rubber	Diaphragm	High Nitrile Rubber
Upthrust Washer / Stop Ring	S.S 420	Motor Base	Cast Iron
Intermediate Bearing	Nitrile Butyle Rubber	Shaft	EN-8
Suction Interconnector	S.S 304	Shaft Extension	S.S 410
Inlet Screen	S.S 304	Sleeves	SS 431
Pump Shaft	S.S 431		
Coupling Splines	S.S 329		
Locking Strap	S.S 304		
Cable Guard	S.S 304		



C.R.I. PUMPS
Pumping trust. Worldwide.

Performance Curve

Pump Model
S8S-95/22

Project Name : Untitled project 2025-03-21 15:01:14.347

Project ID :

Company Name :


Department :

Phone number :

e-mail address :

Curve Tolerance ISO : 9906, Grade-3B

Speed 2900 rpm

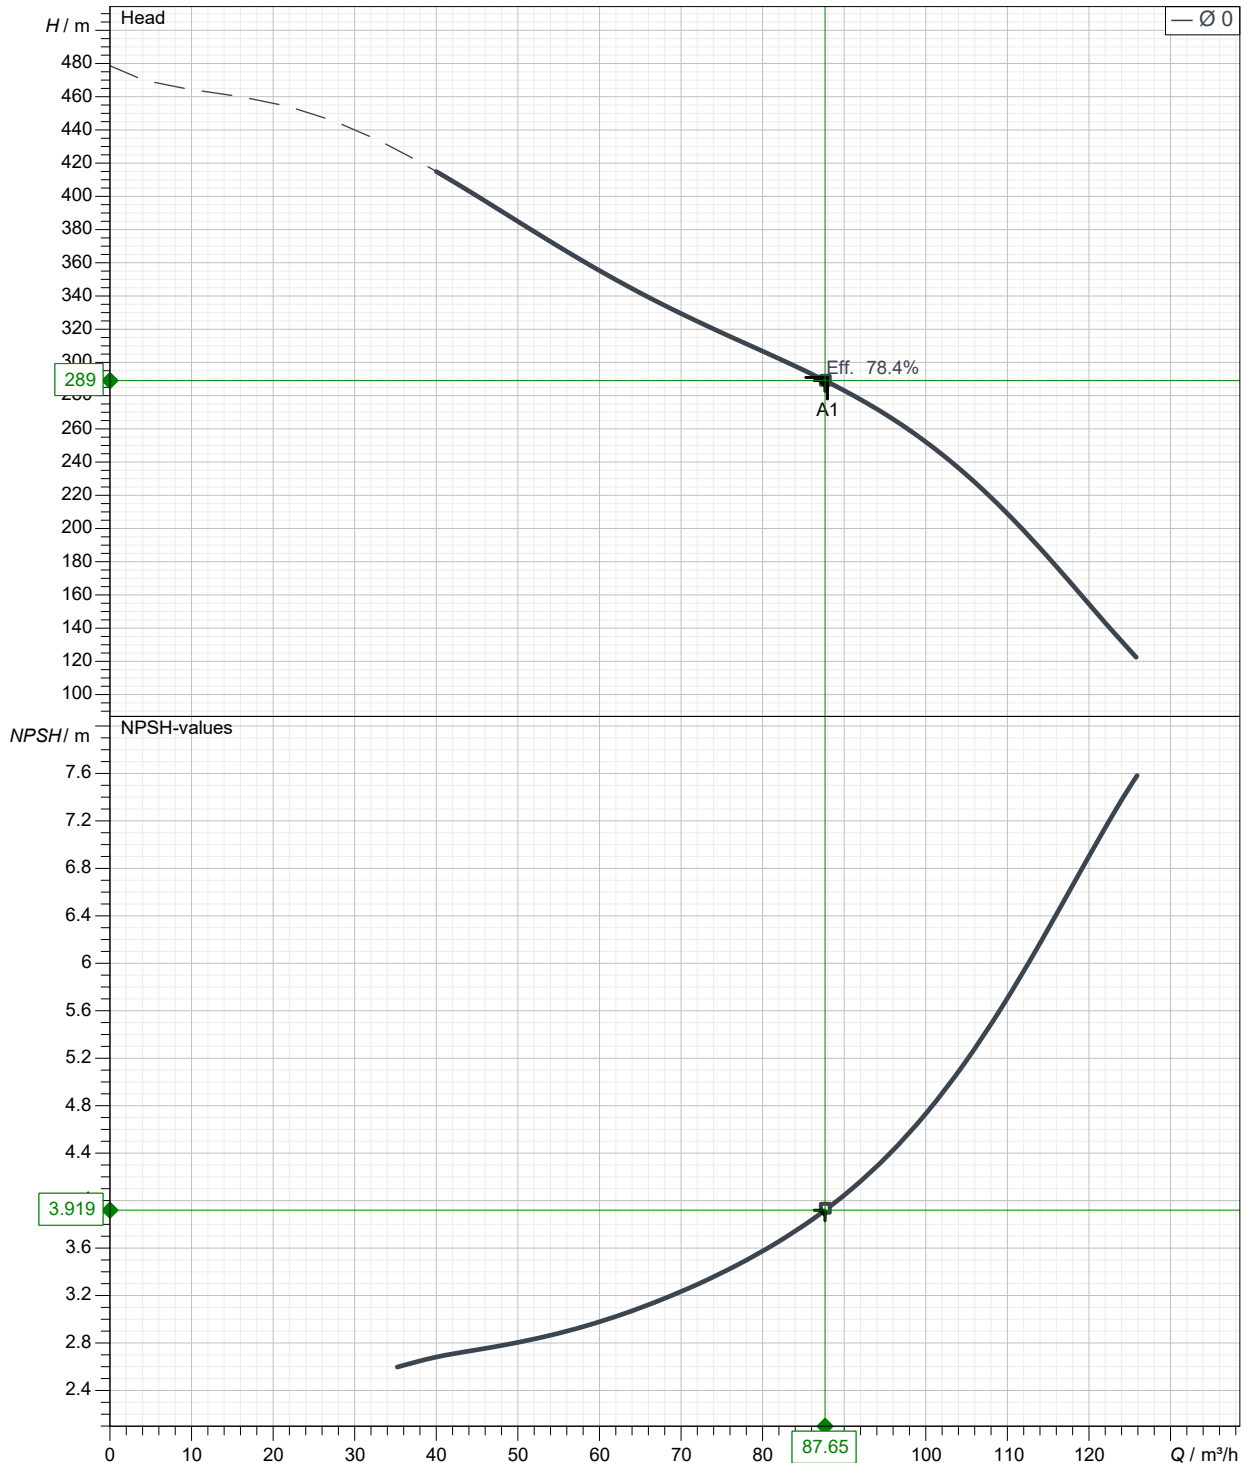



C.R.I. PUMPS
Pumping trust. Worldwide.

Dimensional Drawing

Pump Model
S8S-95/22

Project Name : Untitled project 2025-03-21 15:01:14.347


Project ID :

Company Name :

Department :

Phone number :

e-mail address :

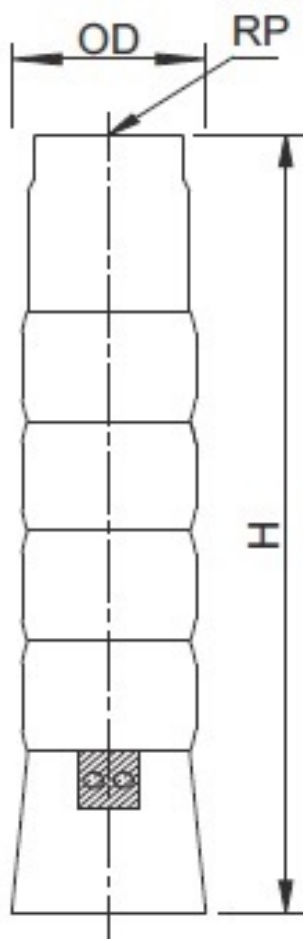

In View of continuous developments, The information/specifications/Description/ Illustrations are subject to change without notice.

Dimensions in mm

H	3242
OD-DOL	193
OD-SD	195
RP	125




Motor Model
W8B-A10DI

Project Name : Untitled project 2025-03-21 15:01:14.347

Project ID :

Company Name :
Department :
Phone number :
e-mail address :

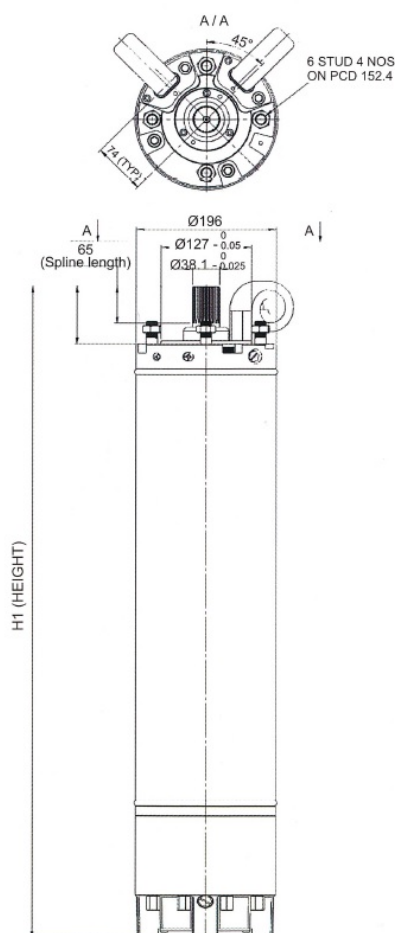

In View of continuous developments, The information/specifications/Description/ Illustrations are subject to change without notice.

Dimensions in mm

D H1	196 1656		
---------	-------------	--	--



C.R.I. PUMPS
Pumping trust. Worldwide.

Performance Curve

Motor Model
W8B-A10DI

Project Name : Untitled project 2025-03-21 15:01:14.347

Project ID :

Company Name :

Department :

Phone number :

e-mail address :

Curve Tolerance ISO : 9906, Grade-3B

