



C.R.I. PUMPS
Pumping trust. Worldwide.

Technical Data

Pump Model
ECW 40/200

Project Name : Untitled project 2025-03-22 10:19:23.013	Project ID :
Company Name : Department : Phone number : e-mail address :	

Requested Data

Flow : 60.38 m ³ /h	Fluid : Water
Head : 54.87 m	Density : 0.9983 kg/dm ³
	Viscosity : 1.005 mm ² /s
	Temperature : 20 °C

Pump

Operating Data

Pump Model : ECW 40/200	Flow : 60.25 m ³ /h
Inlet / Outlet size : 65x40	Head : 54.64 m
Speed : 2900 1/min	Shutoff Head : 60.97 m
Direction of Rotation : Clockwise from the drive end	Shaft Power (BkW) : 12.66 kW
Impeller type : Radial impeller	End of Power curve : 14.74 kW
Impeller Diameter : 209 mm	Efficiency : 70.83 %
Min.Impeller Diameter : 167 mm	NPSHr Value : 5.297 m
Max.Impeller Diameter : 209 mm	Moment of Inertia : 0.141 kg m ²
Maximum Solid Size : 11 mm	Operating Pressure : 5.351 bar
Pump Weight (Approx) : 43 kg	Maximum Allowable Pressure : 5.971 bar
Pump Standard : EN 733	Minimum Continuous Flow : 18.09 m ³ /h

Motor

Frequency : 50 Hz	Speed : 2900 1/min
Phase : 3~	Degree of Protection : IP 55
Rated Voltage : 415 V	Insulation Class : F
Rated current : 26.5 A	Frame size : 160 M
Rated Power P2 : 15 kW	

Material of Construction

Flange Connections

Casing : ASTM A743 / A351 CF8	Suction Flange
Impeller : ASTM A743 / A351 CF8	Pressure rating : 16 bar
Stuffing Box : ASTM A743 / A351 CF8	Nominal pipe size : 65
Wear Ring : ASTM A743 / A351 CF8	Standard : PN 16
Bearing Frame : ASTM A48 class 30B	
Shaft : ASTM A276 AISI 304	Discharge Flange
Shaft Sleeve : ASTM A276 AISI 304	Pressure rating : 16 bar
Shaft seal : GLAND PACKING	Nominal pipe size : 40
	Standard : PN 16



C.R.I. PUMPS
Pumping trust. Worldwide.

Performance Curve

Pump Model
ECW 40/200

Project Name : Untitled project 2025-03-22 10:19:23.013

Project ID :


Company Name :

Department :

Phone number :

e-mail address :

Curve Tolerance ISO 9906 Grade 2B

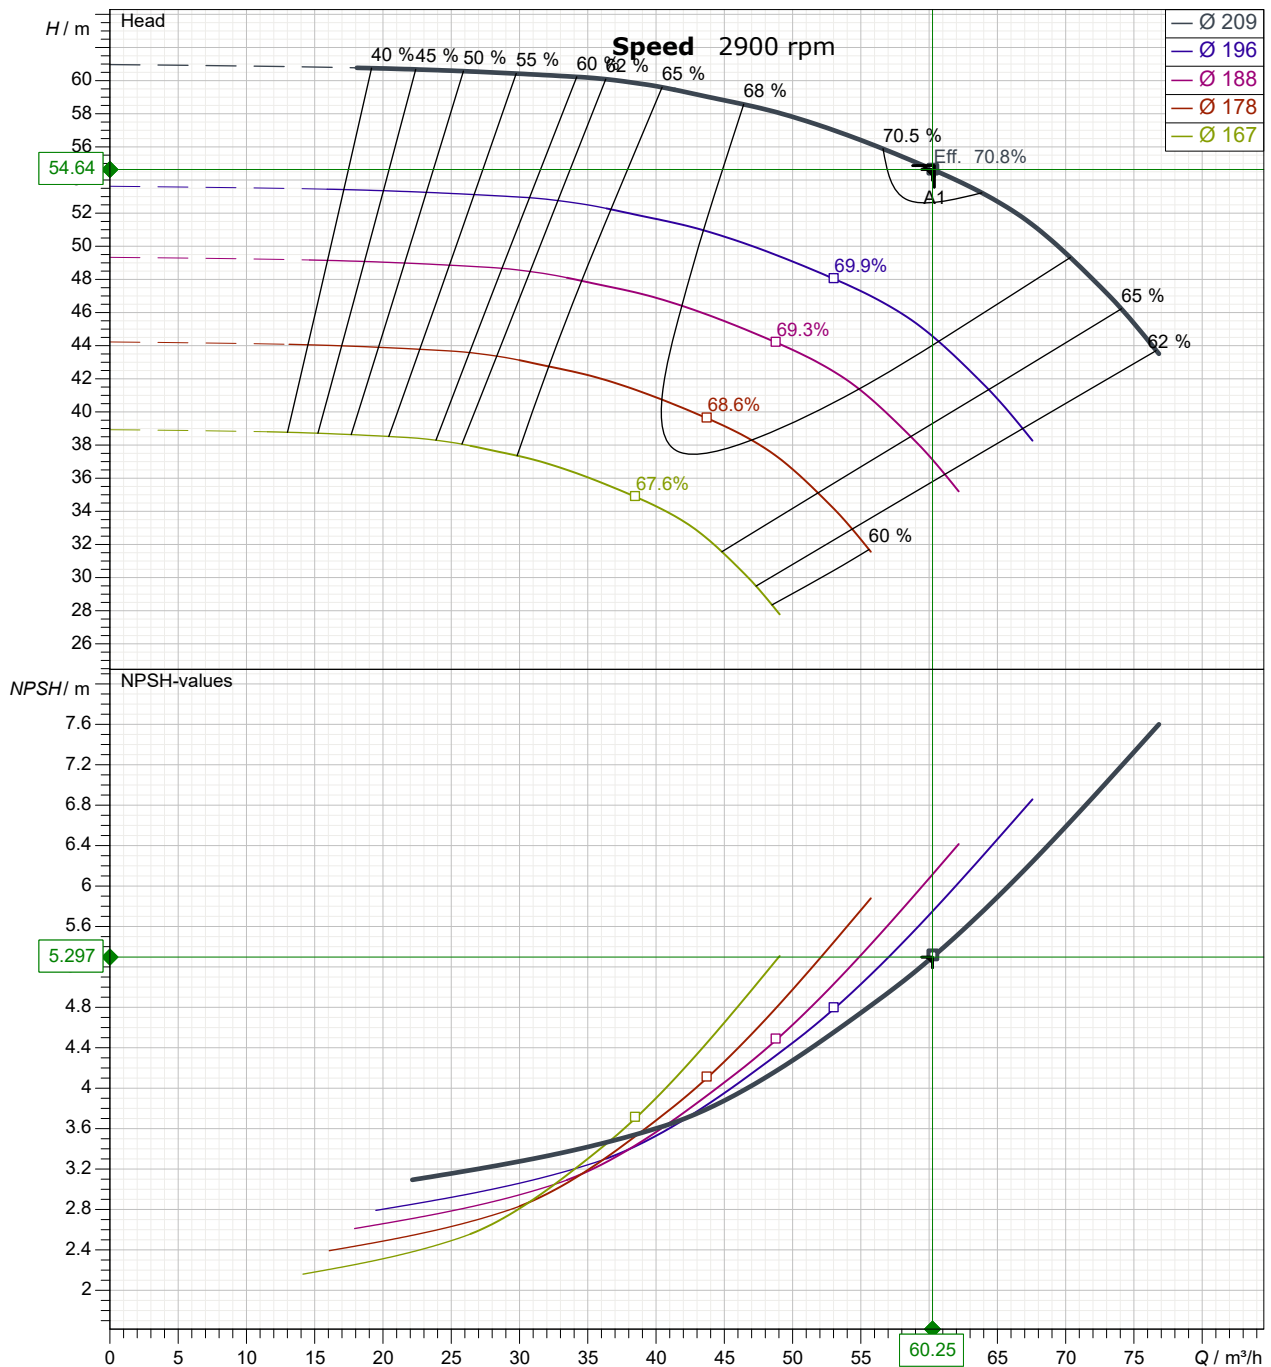

Note:

- Performance is not guaranteed except for the rated point.
 - Curves specified are as per Specific gravity and viscosity of water 1.0,
 - Consider NPSH safety margin minimum of 0.5m .
- To select the motor size, read the value of the Power curve at the duty point



C.R.I. PUMPS
Pumping trust. Worldwide.


Dimensional Drawing

Pump Model
ECW 40/200

Project Name : Untitled project 2025-03-22 10:19:23.013

Project ID :

Company Name :
Department :
Phone number :
e-mail address :

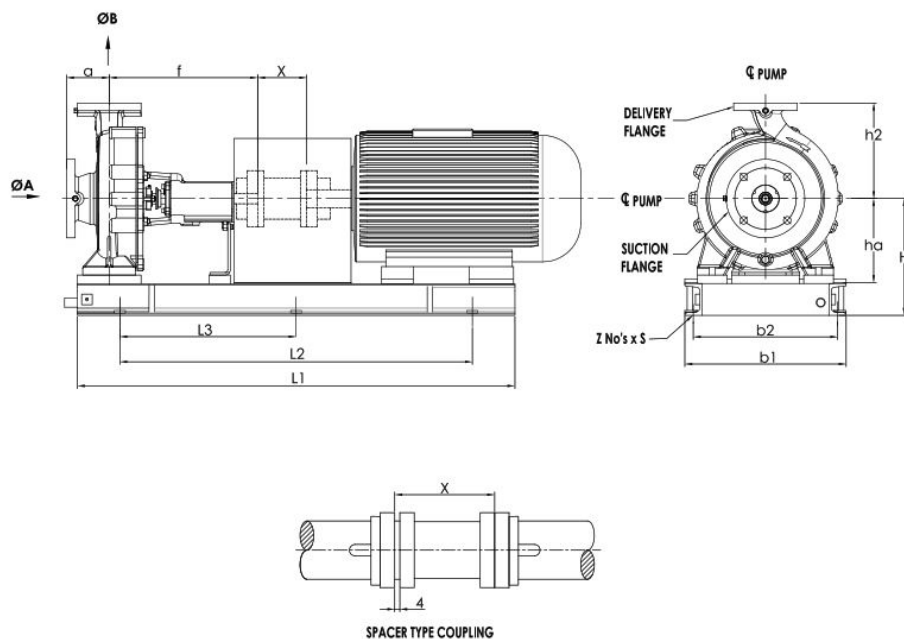

In View of continuous developments, The information/specifications/Description/ Illustrations are subject to change without notice.

Dimensions in mm

a	100			H.D(Delivery)	19
b1	430			H.D(Suction)	19
b2	400			No.of Holes-Discharge	4
f	360			No.of Holes-Suction	4
H	255			Nominal Size (ØA)	65
h2	180			Nominal Size (ØB)	40
hA	180			P.C.D(Delivery)	110
L1	990			P.C.D(Suction)	145
L2	790				
L3	395				
Ø A	65				
Ø B	40				
S	14				
X	100				
Z	6				