



C.R.I. PUMPS
Pumping trust. Worldwide.

Technical Data

Pump Model
CTC-80/160B

Project Name : Untitled project 2025-10-30 10:00:52.276	Project ID :
Company Name : Department : Phone number : e-mail address :	

Requested Data

Flow : 149.4 m ³ /h	Fluid : Water
Head : 26.82 m	Density : 0.9983 kg/dm ³
	Viscosity : 1.005 mm ² /s
	Temperature : 20 °C
	pH-value at t A :
	Vapour pressure at t A : 0.0234 bar

Pump

Pump Model : CTC-80/160B	Minimum Continuous Flow : 60 m ³ /h
No. of Stages : 1	Flow Nominal : 149.9 m ³ /h
Inlet / Outlet size : 100 x 80	Max- : 209.7 m ³ /h
Speed : 2900 1/min	Min- : 60 m ³ /h
Direction of Rotation : Clockwise from the drive end	Head Nominal : 26.86 m
Impeller type : Radial impeller	Max- : 33.17 m
Impeller Design : Closed	Min- : 16.67 m
Pumpset Weight (Approx) : 143 kg	Efficiency Overall Efficiency : 71.93 %
Pump Standard :	Pump Efficiency : 79.66 %

Motor

Motor Model : CTC-80/160B	Insulation Class : F
Frequency : 50 Hz	Frame size : 160
Phase : 3~	Degree of Protection : IP 55
Rated Voltage : 380 V	Method of Starting : Star-delta
Rated current : 29.4 A	Service factor : 1.15
Rated Power P2 : 15 kW	Power factor : 0.89
Speed : 2900 1/min	
Efficiency : 90.3 %	
Motor Standard :	

Material of Construction

Pump casing	Cast Iron
Impeller	Cast Iron
Mechanical seal	Sic/Carbon/SS 304
O' Ring	Rubber
Oil Seal	Rubber
Shaft	Carbon Steel
Motor Case	Aluminium
Back Cover	Cast Iron
Fan Cover	Aluminium
Fan	Plastic
Counter/companion Flange	Galvanized Cast Iron



C.R.I. PUMPS
Pumping trust. Worldwide.

Performance Curve


Pump Model
CTC-80/160B

Project Name : Untitled project 2025-10-30 10:00:52.276

Project ID :

Company Name :
Department :
Phone number :
e-mail address :

Curve Tolerance ISO : 9906

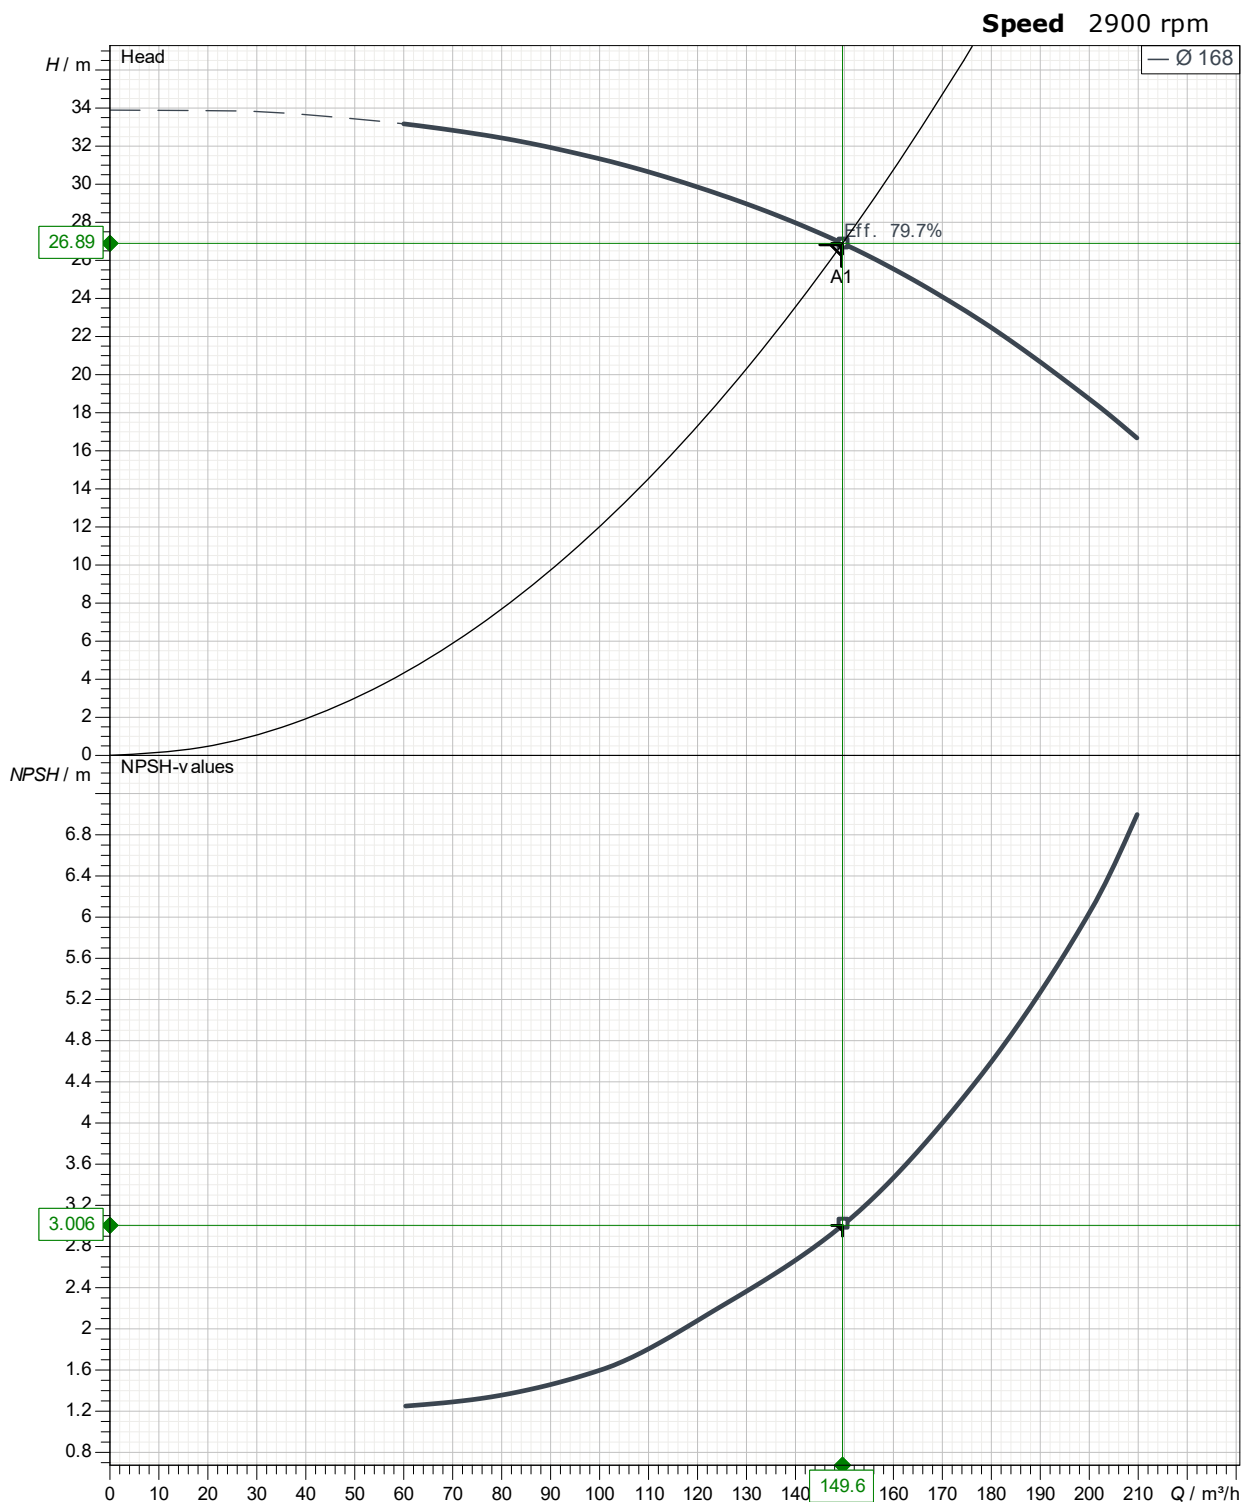



C.R.I. PUMPS
Pumping trust. Worldwide.



Dimensional Drawing

Pump Model
CTC-80/160B

Project Name : Untitled project 2025-10-30 10:00:52.276

Project ID :

Company Name :
Department :
Phone number :
e-mail address :

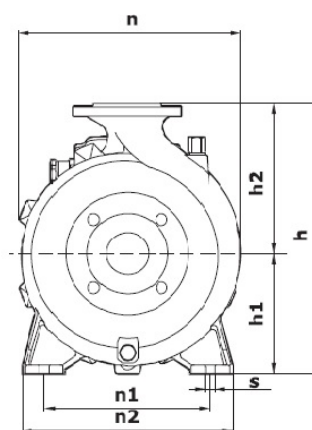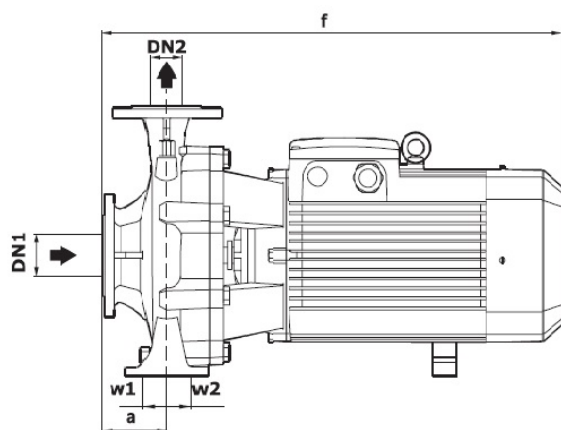

In View of continuous developments, The information/specifications/Description/ Illustrations are subject to change without notice.

Dimensions in mm

a	88	w1	49
DN1	100	w2	49
DN2	80		
f	750		
h	435		
h1	186		
h2	250		
n	330		
n1	255		
n2	332		