
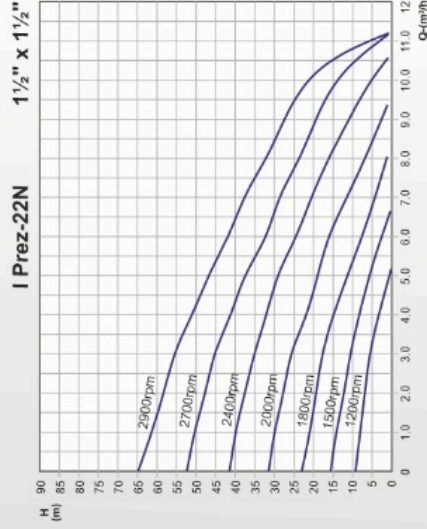
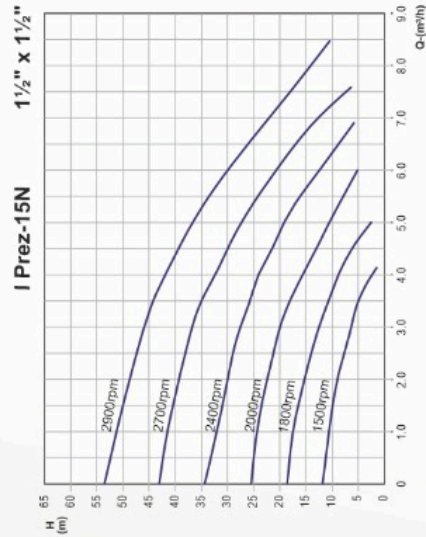
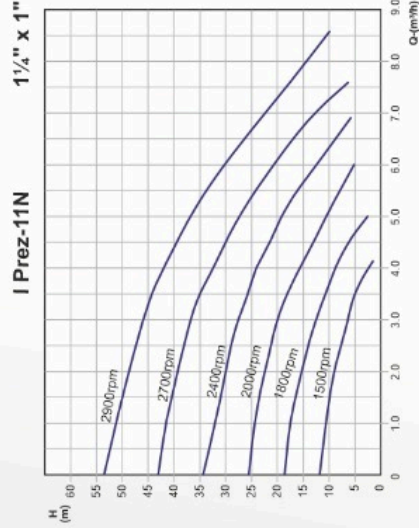


Performance Curves

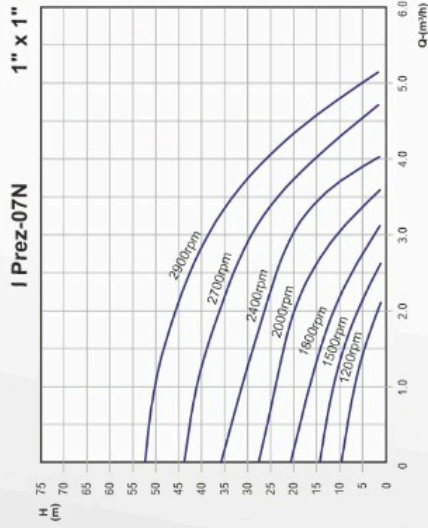

Model	1-storey buildings/Duplex	Taps	Showers	Toilets	Total
I Prez-07N	3 Bedroom House Max	6	1	2	9
I Prez-11N	4 Bedroom House Max	8	2	3	13
I Prez-15N	5 Bedroom House Max	10	3	4	17
I Prez-22N	6 Bedroom House Max	12	4	5	21

Technical Details

Output Frequency	: 20 to 50 Hz
Pressure Setting Range	: up to 6.5 Bar
Pressure Transmitter	: 24V, 4-20mA
Ambient Temperature	: up to 40°C
Liquid Temperature	: up to 70°C
Head Range	: up to 65m
Flow Range	: up to 11m³/h
Power Range	: 0.75kW, 1.1kW, 1.5kW & 2.2 kW
Input Voltage	: 1 Ph, 220V
VFD Output Voltage	: 3 Ph, 220V
Frequency	: 50Hz (Optional 60Hz available on request)

MODEL	I PREZ-07NI	PREZ-11NI	PREZ-15NI	PREZ-22NI
Inlet & Outlet Size	1" x 1"	1¼" x 1"	1½" x 1½"	1½" x 1½"
Diaphragm type pressure vessel	2 Litres	2 Litres	4 Litres	4 Litres

In view of continuous developments the information / performance / descriptions / specifications / Illustrations are subject to change without notice.

C.R.I. PUMPS S.A. (PTY) LIMITED

Stand 63, Capital Hill Commercial Estate, Cnr. K101 & Le Roux Avenue,
Midrand -1685, Johannesburg. South Africa. Phone : +27 11 8058631 /32,
E-mail : cri-za@crifluidsystems.com, Fax : +27-11-8058630


Web : www.crifluidsystems.com



C.R.I. FLUID SYSTEMS
Pumping trust. Worldwide.

i Prez
Series

**HIGH EFFICIENCY
ENERGY SAVING**

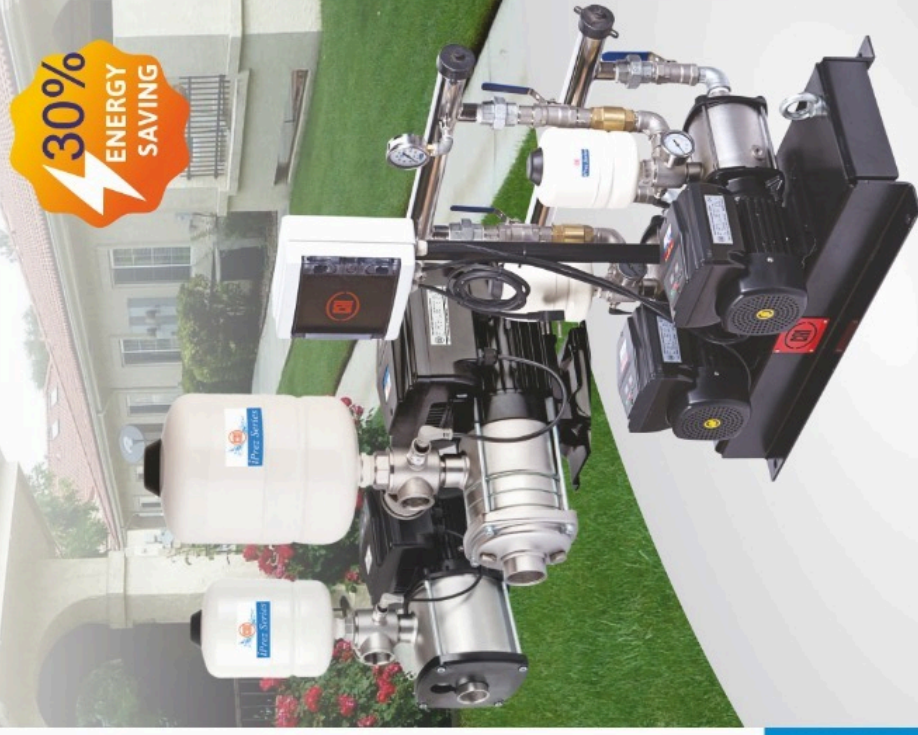

EF-IPRZ-1019-E1