



Technical Data

Project Name : Untitled project 2025-02-13 22:09:54.107	Project ID :
Company Name : Department : Phone number : e-mail address :	

Requested Data

Flow : 1.781 m ³ /h Head : 121.7 m	Fluid : Water Density : 0.9983 kg/dm ³ Viscosity : 1.005 mm ² /s Temperature : 20 °C Vapour pressure at t A : 0.0234 bar
--	---

Pump

Operating Data

Pump Model : MVS-1/25T No. of Stages : 25 Inlet / Outlet size : 25 Speed : 2900 1/min Direction of Rotation : Counter clockwise Impeller type : Radial impeller Impeller Design : Closed Pump Weight (Approx) : 28.2 kg Pump Standard : CRI Standard	Flow : 1.776 m ³ /h Head : 121 m Shutoff Head : 157.1 m Efficiency : 47.77 %
---	--

Motor

Motor Model : MV 3P 2.0HP (IE2) Frequency/Efficiency class : 50 Hz IE2 = High Efficiency Rated Voltage : 380V-415V Δ / 220V-240V Δ Rated current : 3.7A / 6.4A Phase / Rated Power P2 : 3~ 1.5 kW Speed : 2800 1/min Efficiency : 81.3 % Motor Weight (Approx) : 12 kg Motor Standard : IEC-60034-30 / IS-12615	Insulation Class : F Frame size : 90 Degree of Protection : IP 55 Method of Starting : Direct starting Service factor : 1 Power factor : 0.72
--	--

Material of Construction

Flange Connections

Pump Outer Shell : AISI 304 Pump Head : C.I Pump Head Cover : AISI 304 Pump Base : AISI 304 Base Plate : C.I Impeller : AISI 304 MECHANICAL SEAL : SiC/SiC/FKM Bush : SiC / SiC Diffuser (Chamber) : AISI 304 Pump Shaft : AISI 431 Wearing Ring : Teflon O Ring : EPDM Coupling : Mild Steel	Suction Flange Pressure rating : PN 25 Nominal pipe size : DN 25 Standard : DIN EN 1092-1:2008-09 Discharge Flange Pressure rating : PN 25 Nominal pipe size : DN 25 Standard : DIN EN 1092-1:2008-09
--	--



C.R.I. PUMPS
Pumping trust. Worldwide.

Performance Curve

Pump Model
MVS-1/25T

Project Name : Untitled project 2025-02-13 22:09:54.107

Project ID :


Company Name :

Department :

Phone number :

e-mail address :

Curve Tolerance ISO : 9906, Grade-3B

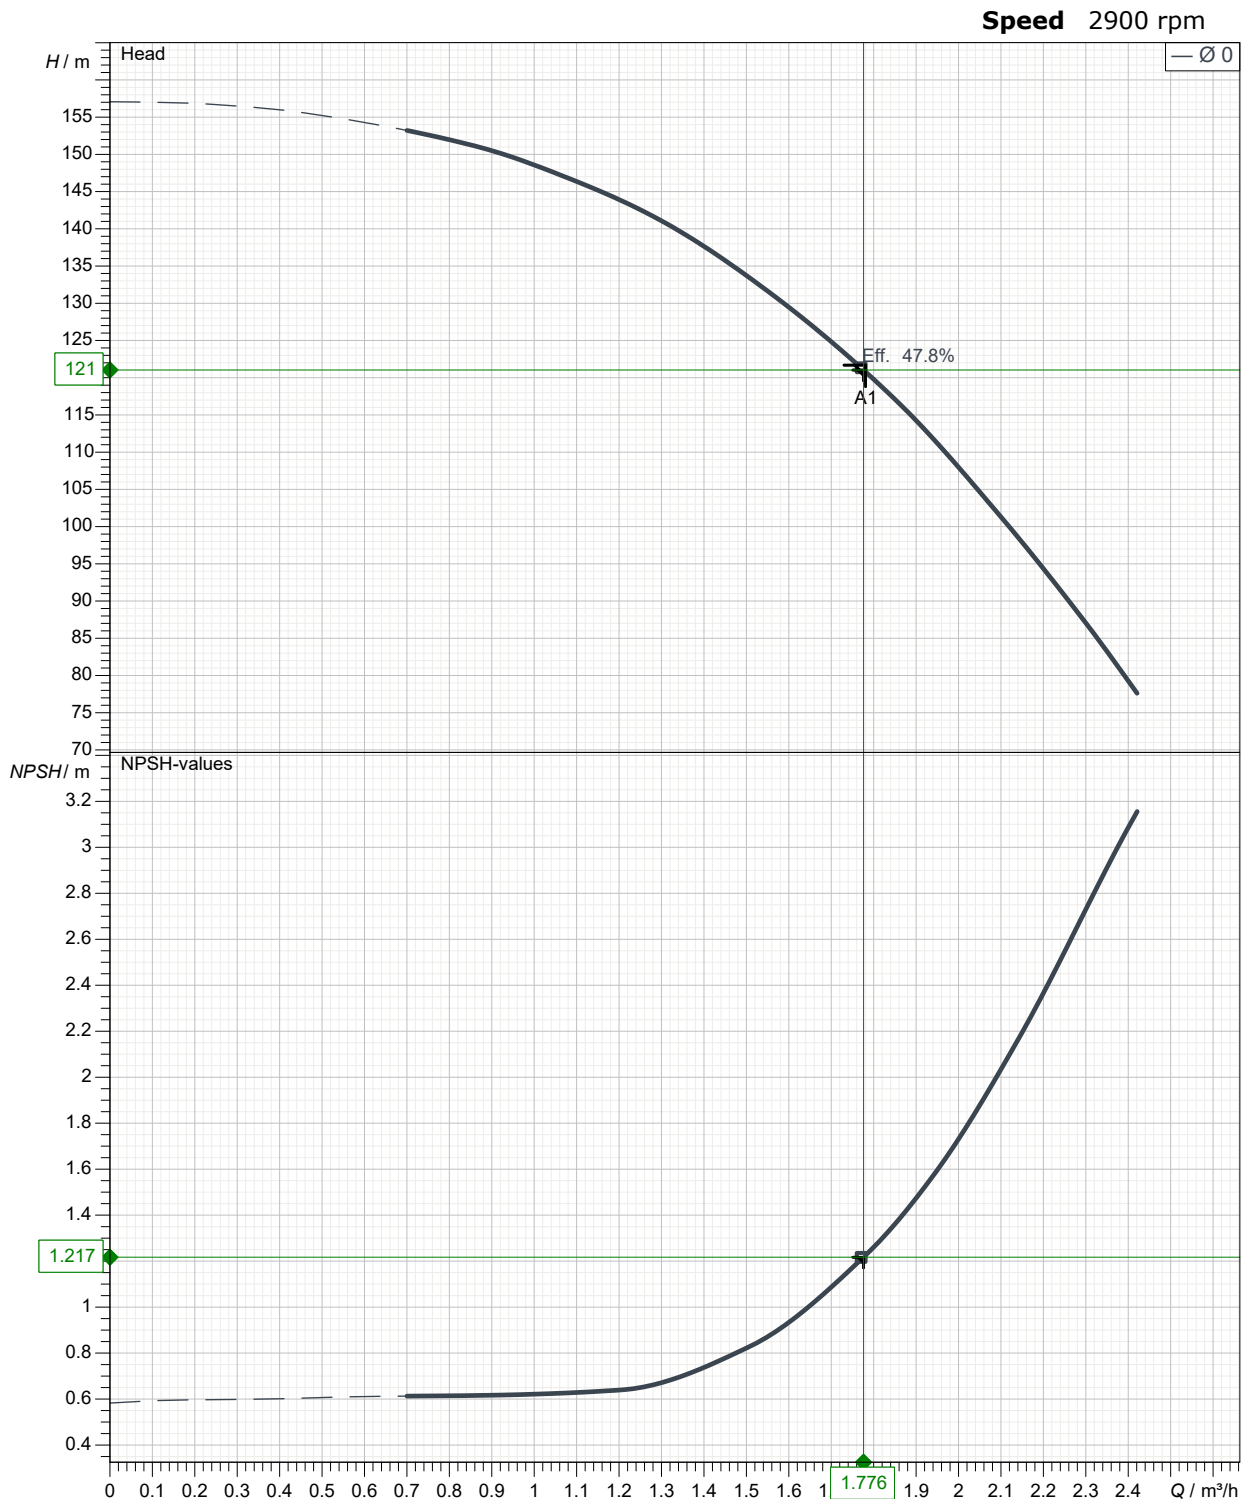




Project Name : Untitled project 2025-02-13 22:09:54.107

Project ID :

Company Name :
Department :
Phone number :
e-mail address :

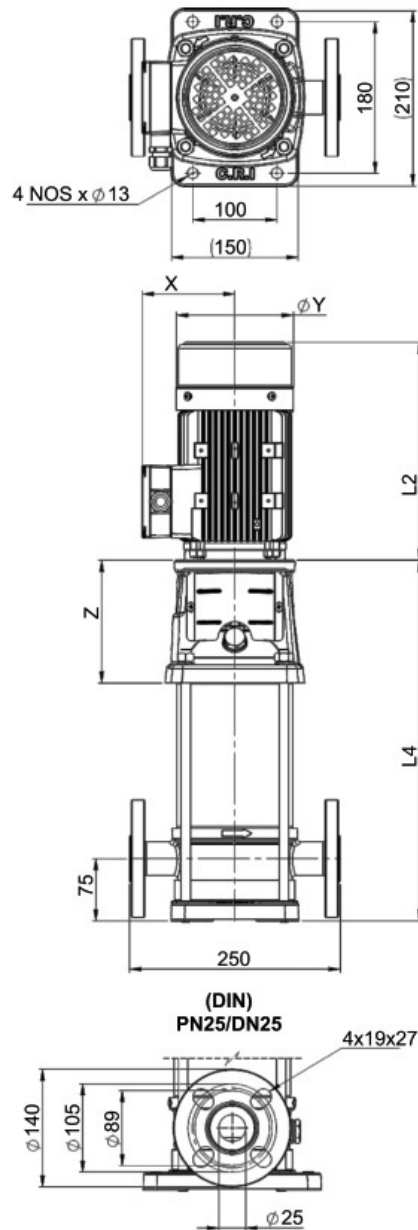

In View of continuous developments, The information/specifications/Description/ Illustrations are subject to change without notice.

Dimensions inmm

L2	290		
L4	705		
X	121		
Y	163		
Z	163		